

23-4D-3060 Residential Multi-Unit 1B (RM1B) Zone

- (A) **Purpose.** Residential Multi-Unit 1B (RM1B) zone is intended to provide a transition between medium-intensity residential zones and higher-intensity residential zones or mixed use and main street zones.
- (B) **Overview.** This zone allows a variety of multi-unit housing in large detached house scale and attached rowhouse buildings with accessory dwelling units. It can be summarized as:
 - (1) eligible for affordable housing bonus programs; and
 - (2) the compatibility effects of this zone require additional setbacks but not height stepbacks.
- (C) **Requirements.** A lot zoned residential multi-unit 1B shall comply with the requirements of this subsection, which are established in the following tables:
 - (1) Table (A) (Lot Size and Intensity);
 - (2) Table (B) (Building Placement);
 - (3) Table (C) (Building Form);
 - (4) Table (D) (Height);
 - (5) Table (E) (Encroachments);
 - (6) Table (F) (Parking);
 - (7) Table (G) (Frontages);
 - (8) Table (H) (Impervious Cover); and
 - (9) Table (I) (Open Space).



RM1B

Addendum Change

23-4D-3060

Residential Multi-Unit 1B (RM1B) Zone

Residential Multi-Unit Zones

Table 23-4D-3060(A) Lot Size and Intensity

Allowed Use	Lot				Building	
	Principal Dwelling Units per Acre (max.)		Width (min.)	Area (min.)	Size (max.)	
	Base Standard	AHBP Bonus ¹			Base Standard The less restrictive shall apply between:	
Single-Family Attached	18	+0	25'	2,500 sf	0.4 FAR or 1,150 sf	
Duplex	18	+0	45'	5,000 sf	0.4 FAR or 2,300 sf	
Live/Work	24	+0	18'	2,400 sf	0.8 FAR	
Multi-Family	18	+28	50'	5,000 sf	0.8 FAR	
Townhouse ²	18	+0	24'	2,400 sf	0.8 FAR	
Other Allowed Uses	—	+0	50'	5,000 sf	0.8 FAR	
Accessory Allowed Use	Lot Size			Size (max.)		
Accessory Dwelling Unit	3,500 to 4,999 sf			750 sf		
Accessory Dwelling Unit	5,000 to 6,999 sf			975 sf		
Accessory Dwelling Unit	7,000 sf or greater			1,100 sf		

Only one Accessory Dwelling Unit may be built and does not count towards Principal Dwelling Units per Lot limit.

Accessory Dwelling Unit size counts towards the principal use's FAR limit.

Preservation Incentive: Accessory Dwelling Unit does not count toward FAR limit when existing house (at least 10 years old) is preserved.

¹ To receive affordable housing bonus, a project must comply with Article 23-3E (Affordable Housing).

² Shall be built in a run with a minimum of 3 attached buildings.


Key for Tables

A = Allowed


— = Not Allowed

N/R = No Requirement

Building Placement Diagram

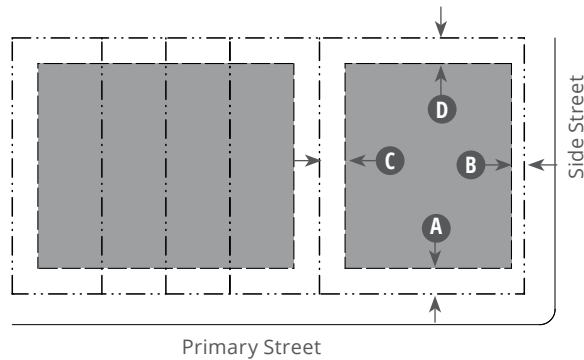

Building Form Diagram

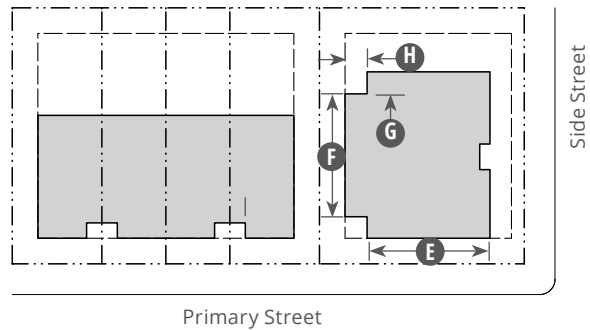

Key for Diagrams

--- ROW / Lot Line
 ■ Buildable Area

--- Building Setback Line ■ Building Footprint

Table 23-4D-3060(B) Building Placement

(1) Setback (Distance from ROW / Lot Line)	Front A	Side St. B	Side C	Rear D
Minimum	10' ¹	5' ¹	5'	10' ²

¹ Front and side street setback exceptions are provided in Section 23-4E-7070 (Setback Exceptions).

² The rear setback is five feet for an accessory structure that is adjacent to an alley.

(2) Additional Setbacks

(a) Additional setback and/or easement may be required where street right-of-way, public easement, or utilities easement is required.

(3) Compatibility Setbacks

(a) Where a portion of a building is across an alley less than 20 feet in width from a property zoned Residential House-Scale; or is adjacent to a property zoned Residential House-Scale. Then minimum setbacks shall be provided along the alley or shared lot line that comply with subsections (b) and (c).

(b) Compatibility Setback	Front A	Side St. B	Side C	Rear D
For lots ≤ 75' wide	10'	5'	15'	30'
For lots > 75' wide	10'	5'	20'	30'

(c) Where a compatibility setback along a side or rear lot line, then a landscape buffer shall be provided that complies with Section 23-4E-4090 (Intermittent Visual Obstruction Buffer).

Table 23-4D-3060(C) Building Form

(1) Overall Building Envelope	
Width (max.)	100' E
(2) Building Articulation New Construction	
Articulation is required for side walls on additions or new construction that are 15 feet or taller and located within 9 feet of the side lot line.	
(3) Facade(s), All Stories	
Facade Length without Articulation (max.)	60' F
Articulation Length (min.)	12' G
Articulation Depth (min.)	6' H


Addendum Change

23-4D-3060


Residential Multi-Unit 1B (RM1B) Zone

Residential Multi-Unit Zones

Building Height Diagram

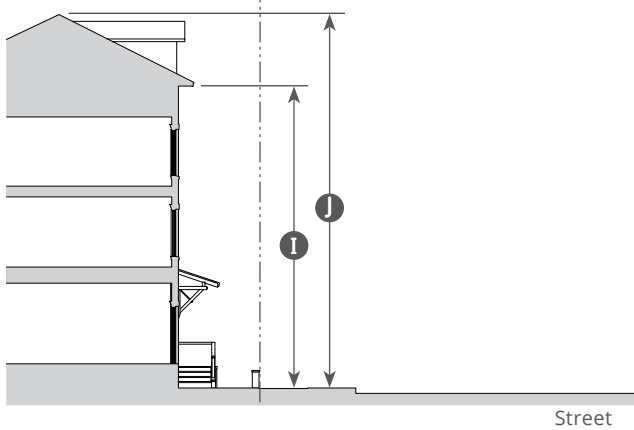

Encroachments Diagram

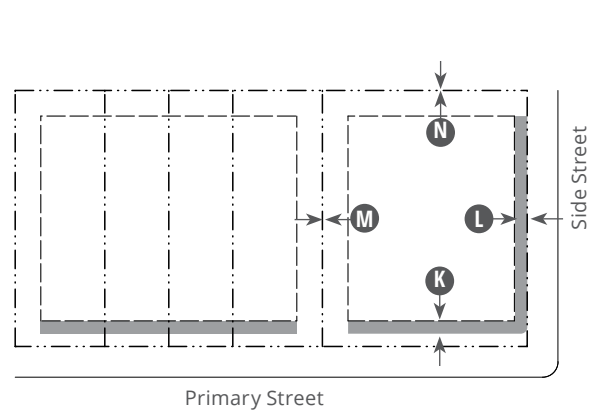

Key for Diagrams

- ROW / Lot Line
- Building Setback Line

■ Encroachment

Table 23-4D-3060(D) Height

(1) Primary and Accessory Building

To Top Plate (max.)	35'	I
Overall (max.)	45'	J

(2) Accessory Structure

Overall (max.)	12'
----------------	-----

Table 23-4D-3060(E) Encroachments

(1) Encroachment Type	Front (max.) K	Side St. (max.) L	Side (max.) M	Rear (max.) N
Private Frontage	5'	5'	—	—
Architectural Features	3'	3'	—	—
Fountain	8'	3'	8'	8'
Pool	—	3'	8'	8'

Ramp. When a ramp encroaches into a setback, then the ramp shall comply with Section 23-4E-7080 (Standards for Ramps Located Within Encroachments).

Landscaping may be located in a required setback.

Encroachments within a right-of-way, public easement, or utility easement require a license agreement or encroachment agreement.

Table 23-4D-3060(E) Encroachments (continued)

(2) Height Encroachment

The following height encroachment types may encroach above the top plate maximum up to the overall maximum.


(a) Height Encroachment Type	Encroachment Height above top plate (max.)	Encroachment Length (max.)
Gable End	11'	30', within 60' of Front Lot Line
Dormers	11'	15' combined on each building

See Section 23-4E-7050 (Encroachments Above Maximum Height) for additional standards.

Key for Tables

- A = Allowed
- = Not Allowed
- N/R = No Requirement

Parking Diagram

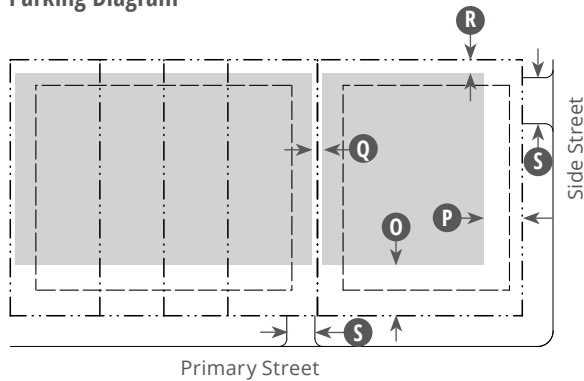

Key for Diagrams

- · - · - ROW / Lot Line
- - - Building Setback Line

■ Parking Area

Table 23-4D-3060(F) Parking

(1) Parking Requirements

See Section 23-4D-3040 (Parking Requirements) for standards.

(2) Setback	Front O	Side St. P	Side Q	Rear R
At-Grade and Above-Grade	20' ¹	15'	2'	5'
Below-Grade	10'	5'	10'	10'

(3) Parking Driveway

Width 10' max. **S**

Driveways may be shared between adjacent parcels.

When lot has adjacent alley with a right-of-way width of 20' or greater, parking must be accessed only from the alley.

Garage doors along the front facade of the primary building must occupy no more than one-third the width of the front facade.

¹ Required parking space(s) must not be located in front of the front facade of the building.

Table 23-4D-3060(G) Frontages

(1) Private Frontage Type	Front	Side St.	Standards
Porch: Projecting	A	A	23-4E-1040
Porch: Engaged	A	A	23-4E-1050
Stoop	A	A	23-4E-1060
Dooryard	A	A	23-4E-1070

For non-residential uses, loading docks, overhead doors, and other service entries must be screened and not be located on primary street facades.

(2) Pedestrian Access

All units must have pedestrian access from the primary street, or for corner lots, from the primary street or side street.

(1) Impervious Cover	% (max.)	Standards
Impervious Cover	60% ¹	23-3D-3
Building Cover	50%	

See Division 23-3D-3 (Impervious Cover) for additional standards.

¹ The maximum impervious cover may not be attainable due to unique site characteristics, such as trees, waterways, and steep slopes. Where necessary, the development **must** reduce the impervious cover to comply with other requirements of this Title.

(1) Open Space Type	Width (min.)	Depth (min.)	Percentage (min.)
Common ²	8'	10'	5% gross site area

Common open space requirement may be met by ground floor, upper floor, and/or roof common open space.

Common open space requirements **must** not be met by open space provided in required front or side-street setbacks, except when provided as an open space as set forth in Division 23-4C-2 (Civic and Open Spaces).

² The Courtyard building type has additional open space standards. See Section 23-4D-2220 (Supplementary Courtyard Building Type Standards).